

G2205D

5GE Cloud Managed Switch

G2205D

5GE Cloud Managed Switch

Descriptions



G2205D is a 5-port Gigabit intelligent cloud management switch independently designed by IP-COM. It supports cloud WEB platform management and Profi APP management. It can automatically detect loops and private routers and send alarms. Network maintenance is more efficient, after-sales costs are lower, and switches can be configured without leaving home.

Features

- Compliant with IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3x, IEEE802.3z, IEEE802.1p, IEEE802.1q standards
- 5 × 10/100/1000 Base-T Ethernet ports
- 8 K MAC address table and MAC address auto learning
- IEEE 802.3x full-duplex flow control and half-duplex backpressure flow control
- 10 Gbps switching fabric for non-blocking line-speed forwarding
- Cloud web UI and ProFi App managementmanagement
- Support QVLAN, DHCP Snooping, loop protection, etc.

USPs



Cloud Management

The switch can be managed through both the IP-COM Cloud web UI and ProFi App. You can scan the QR codes on the switches to add them in batches for cloud management. The cloud platform will automatically generate a visible network topology for you to view the operation status of each device in a project anytime and anywhere.



Log alarm

Supports abnormal status protection and real-time alarms such as loops and private routers .



All Gigabit


The switch provides 5 gigabit ports, 10 times faster, ensuring smooth transmission of large files and videos.



Abundant Management Features

The switch offers QVLAN, VLAN transparent transmission, traffic statistics, loop guard, MAC address binding, DHCP Snooping and other functions, suitable for various scenarios of network deployment.

Typical Scenario

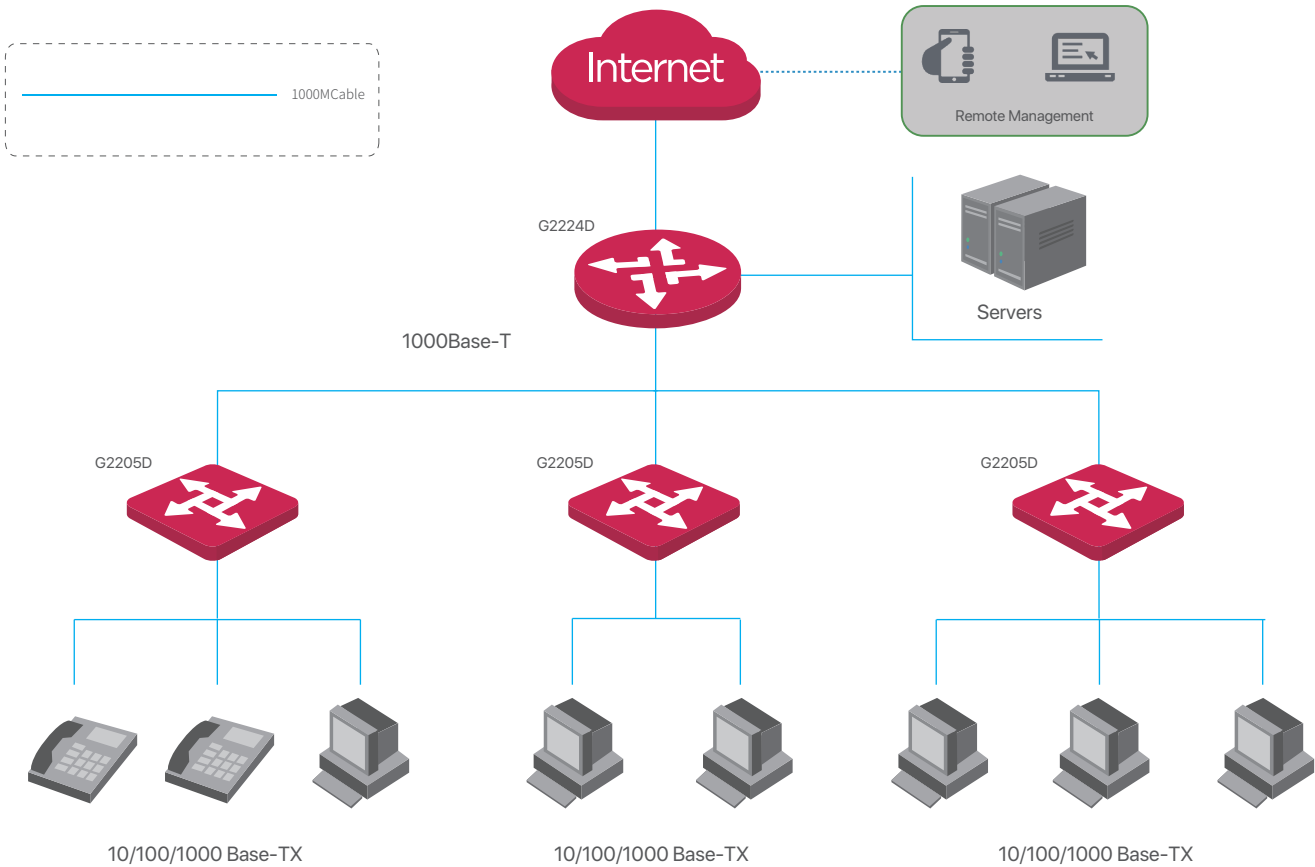

Specifications

Hardware specifications	
Network Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.3z, IEEE 802.1q, IEEE 802.1p
LED indicators	One Link/Act LED indicator for each port One PWR/SYS LED indicator for each device
Fixed ports	5 × 10/100/1000 Base-T Ethernet ports (Data)
Lightning protection	Port: 6 kV Power supply: 6 kV
Forwarding mode	Store-and-forward
Switching capacity	10 Gbps
Packet forwarding rate	7.4 Mpps
Switching buffer	NA
MAC address table	8 K
Input voltage	100 - 240V AC 50/60Hz
Dimensions (L x W x H)	100 mm × 64 mm × 25 mm
Environment	Operating temperature: 0°C - 40°C Storage temperature: -40°C - 70°C Operating humidity: (10% - 90%) RH, non-condensing Storage humidity: (5% - 90%) RH, non-condensing
Certificates	FCC, CE, RoHS

Specifications

Software Features	
Security Features	Support whitelist binding of MAC addresses, ports and VLAN Support port isolation
VLAN	Support VLAN transparent transmission Support IEEE 802.1q VLAN
DHCP	Support DHCP Client Support DHCP Snooping
IGMP	Supports IGMP fast leave Supports IGMP Report Suppression
QoS	Support DSCP priority Support SP, SWP, WP
Port Properties	Support port flow control Support port isolation Support N:1 port mirroring Support port statistics of received and transmitted packets, conflict packets and CRC error packets
Rate Limit	Support ingress and egress rate limits on ports
Loop Guard	Support loop detection and guard on each port
Storm Control	Support storm control on ports
Upgrade, Import and Export	Support HTTP upgrade Support configuration import and export
Management and Maintenance	Support ProFi App management Support Cloud web UI management Support local web UI management Support ping test

IP-COM
World Wide Wireless

IP-COM NETWORKS CO., LTD.

Tower E3, No.1001, Zhongshanyuan Road,
Nanshan District, Shenzhen, China. 518052

Service: info@ip-com.com.cn

Inquiry: marketing@ip-com.com.cn

Tel: +86-755-27653089

Specifications are subject to change without notice. Copyright ©2024 IP-COM Networks Co., Ltd. All Rights Reserved. IP-COM is the trademark of IP-COM Networks Co., Ltd. All other brand names mentioned herein are the trademark or registered trademarks of their respective holders.